leanWOOD

Book 7 – part B resources

Emilie Bossanne FCBA Institut Technologique, Bordeaux, France

Anne-Laure Levet FCBA Institut Technologique, Champs sur Marne, France

Florence Bannier FCBA Institut Technologique, Bordeaux, France

Jean-Luc Kouyoumji FCBA Institut Technologique, Timber Construction Group, Research Division, Bordeaux, France

31.07.2017

1. LCC on case studies

Authors

Emilie Bossanne

FCBA Institut Technologique, Bordeaux, France

Co-Authors

Anne-Laure Levet

FCBA Institut Technologique, Champs sur Marne, France

Florence Bannier

FCBA Institut Technologique, Bordeaux, France

Jean-Luc Kouyoumji

FCBA Institut Technologique, Timber Construction Group, Research Division, Bordeaux, France

Project Partners

Research

Hochschule Luzern – Technik & Architektur, Kompetenzzentrum Typologie & Planung in Architektur (CCTP) (Koord. Schweizer Konsortium) TUM Technische Universität München, Professur für Entwerfen und Holzbau, Germany (Koord. Int. Konsortium) Aalto University, Chair of Wood Construction, Finland VTT Technical Research Centre of Finland, Finland FCBA Institut Technologique, France

SME Partners/other funding

Uffer AG, Savognin (Switzerland) Makiol Wiederkehr AG, Beinwil (Switzerland) Timbatec Holzbauingenieure AG, Thun, Bern, Zurich (Switzerland) Kämpfen für Architektur AG, Zürich (Switzerland) Lignatur AG, Waldstatt (Switzerland) Gumpp&Maier. Lösungen aus Holz (Germany) lattkearchitekten, Arch. Frank Lattke (Germany) Rakennusliike Reponen Oy (Finland) Federation of the Finnish Woodworking Industries (Finland) KINNO Kouvola Innovation Oy (Finland) SK Finnish Real Estate Federation (Finland) Federation of the Finnish woodworking industries (Finland) LECO Construction, XJ Développement (France)

Funding

KTI Kommission für Technologie und Innovation (Switzerland) BMEL Bundesministerium für Ernährung und Landwirtschaft unter der Projektträgerschaft der FNR Fachagentur Nachwachsende Rohstoffe e.V. (Germany) TEKES The Finnish Funding Agency for Innovation (Finland) Ministry of Agriculture, Fisheries and Forestry Resources, MAAF (France) French Environment and Energy Management Agency, ADEME, (France)

FP7 Seventh Framework Programme European Union WoodWisdomNet+

Insofar as the masculine form is used in the contents of this report solely for reasons of better readability it is assumed that this refers to both genders on equal terms.

CONTENT

1	FCB	A Headquarters case study	
	1.1	Part 1 – General information on the project	
	1.2	Project participants	
	1.3	Handling of timber building process	4
	1.4	Diagram of main actors of the project	
	1.5	Further questions	
	1.5.	1 Forecast planning	6
	1.5.	2 According the forecast planning, 2 main delays were identified:	7
	1.5.	3 Minor delays	7
	1.5.		
	1.6	Feedback regarding the use of wood	7
	1.6.	1 Relation between actors and planning	9
	1.6.	2 Checklist of collected documents	9
2	LCC		
	2.1	Introduction	
	2.2	Principles of Life Cycle Costing	
	2.3	Calculation results	
	2.3.	1 Case study: Helsinki	
	2.3.	2 Case study: FCBA Headquarters	12

1 FCBA Headquarters case study

1.1 Part 1 – General information on the project

Version 03.03.2015




Project Name	FCBA Champs-sur-Marne headquarters				
Location	10 rue Galilée 77420 Champs-sur-Marne France				
Measurement	New building				
Use of the	Office and laboratories				
building					
Gross floor area	14 000 m ² SHOB				
Rentable net floor area	10 600 m ² SHON : 4000 m ² of offices and 6 600 m ² of laboratories				
Gross Volume	/				
Height of building	5 storeys				

1.2 Project participants


Rôle dans le projet	Nom	Ville	Site internet	Contact
	entreprise			
Client	FCBA	Champs-sur-	www.fcba.fr	Bruno.piens@fcba.fr
		Marne		
Entreprise générale / gestionnaire de la construction	LEON GROSSE	Versailles	http://www.leongrosse .fr	/
Architecte	ATELER 4+	Lyon	www.atelier4plus.fr	/
Ingénieur civil et structurel	LEON GROSSE TRAVAUX	Versailles	http://www.leongrosse .fr	/
Ingénieur bois- construction	MATHIS	Muttersholt z	www.mathis.eu	/
Ingénieur des services de construction	/			/
Fabricant bois	MATHIS	Muttersholt z	www.mathis.eu	/

1.3 Handling of timber building process

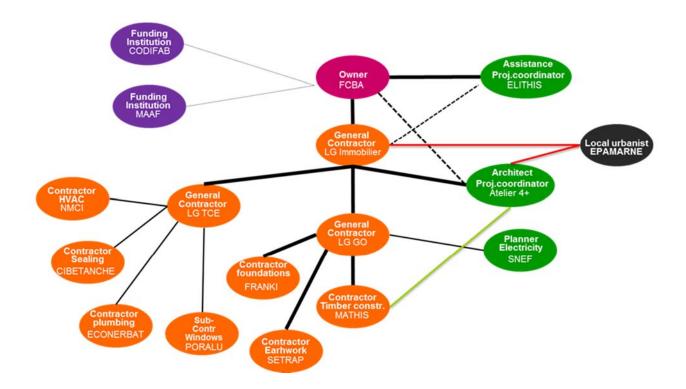

To work on this case study, different interviews were carried out with several actors of the project

- ELITHIS: assistance with contracting
- FCBA: client
- LEON GROSS GROS OEUVRE: general contractor
- ATELIER 4+ : Architect
- MATHIS : timber manufacturer

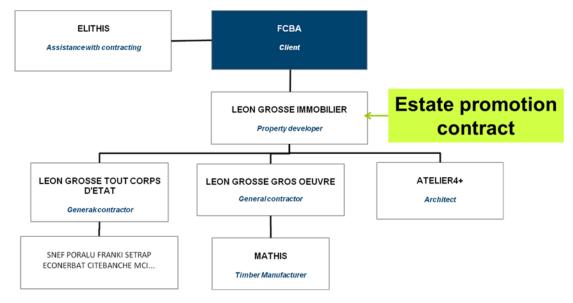

1.4 Diagram of main actors of the project

Task	Experience
Decision for the project	It was decided in 2010 to move FCBA's headquarters because even in FCBA owned its headquarters buildings, the land belonged to the French government who needed to get the land back. A preplanning process was defined with the general contractor. As FCBA is the Technological Institute in France for wood, it was compulsory to use wood in the structure of the building.
Preplanning / Concept design	FCBA launched a tender with requirements about the use of wood. The general promoter answered the tender in collaboration with the architectural firm who did not have advanced skills in wood construction. The architect in charge of the answer asked from the beginning to work with a timber manufacturer to answer the tender.
Planning / Developed design	The architect and the general contractor worked on the planning and developed design in relation with the requirements of the tender. The timber manufacturer was solicited when needed to confirm options suggested by the architect.
Detailed Planning / Technical design	Collaboration architect/engineers/timber manufacturer challenges/good experiences/interfaces

	The collaboration between the architect and the timber manufacturer enabled the architect to design the building with approval of the general contractor. Once some technical discussion occurred between the architect and the timber manufacturer who disagreed on a technical solution.
Manufacturing	One contractor (Leon Grossse Gros oeuvre) with subcontractors, in particular for the timber structure and cladding (Mathis)
Prefabrication	Timber frame walls were prefabricated
On site project management	The project was managed by Leon Gross Gros Oeuvre without specific experience with wood building. Considering the size of the project one person managing the project was not enough (managing both technical and administrative aspects).
Costing	The contract with FCBA was a sale before completion transaction (VEFA in French) so the budget was based on the initial program. The final budget is therefore very close to the initial estimation.
Tender	The tender specifications mixed both functional and detailed requirements because the building had to house laboratory activities and offices. The use of wood was compulsory so all the answers without specific experience in wood could not be accepted.
Procurement + Contract model	The procurement was a sale before completion transaction. There was no Public-Private Partnering but FCBA benefited from public financial support. The estate promotion contractor had 3 main subcontractors, 2 of them being subsidiaries and the third one the architect.

1.5 Further questions

1.5.1 Forecast planning

	12/14	Rom de la tâche Duries complite de l'opération FCBA en DM	Outle 28.76 more	Ven 106212	Develop (2):1 A H J Servers (2):1 A H J Beravers (2):1
	-	Office eler prite of amalgose do l'utilito.	1.07	Ven 1002912	20th de units et la universida FORVa
	-	Revise de Colline	0.000	Vec 18/82/12	
	-	Highmania au CPI	N pur	Jan 101017	 1002 Bigartes do CPI
	-	anternations administration	1.74 mas	Jan 03/89/13	+ 0.000 motorsultany approximations
	-	programmers of projectation its manager on poi-or & Higgsmanner	21mm	Jan 100012	
	-	Apartituation documentary frequencies	1,007	Ven 01/09/12	6 parameters and party and an an and a final statement of a figure set of the party of a figure set of
		instantion das motifications dams militas per l'Assemante	100	Mar OK SHITT	3 Z Apprabation disease per fuperments
	-	Examen du pré-écount PE par Résenante el le ville de Diames	3 min	Mar 12/08/12	a Statistical interview of the supervision of th
	-	restifuzioni de l'incord de loganame sur dosser PC	0.000	200 100812	3 2 Examine do pre-davanar PC per Plasmenne el la vela de Chanque
	-	rind to PC	W plants	Week Inspector	1404 Zacellization de Pauzurd de Presentance sur directer PC
	-	DELAI DINETRUCTION DE E AUTORIANDAE ADMINETRIATIVE E	10,000	Lun (Sillert)	11 🗸 Angel (n. 175
	-	idention da PC	1104	Vac Miller 2	12 to 14 DYNER UCTION BIS AUTORISATIONS ADMINISTRATIONS
	-	page the second control is PC at durewait	66.mm	Lan 17/08/12	1000002 4 9 %
		Prote Pudre	13.52 moie		14 Prove Model
	-	DS DEMARRAGE at uses APD	0 iov	(in) 140512	e internetien
	-				1406 af DE SEMARRAGE plantes AFD
1		ETUDE press APD	59.000	Ver 150812	17 2 Cital phone APD
1	7	Validation phase APG	75.mm	Ware 21/08/12	18 withdow phase APG
		OF DE RECEPTION DES ETUDES PHASE APD	(3 june	191320972	2009 4 OR DE RECEPTION DES STUDES PHASE APD
2	2	128 DEMANDADE #1mm PMCI	(3 pm)	3er 53(28,25	CORT ANNAL COLORED COT
	2	ETLIDE Phase PHD	50,0041	VHC 21 EW12	21 * 11/26 Promo PRO
1	7	validation FHAGE FIND	13 jauns	1.un 08/10/10	22 validation PHASE PRO
3		ETUDE phase devocation/ systems	133 jours	au391212	11 TTUE provident systems
•	*	phane traveux	18.1 mpla	Java 20112113	phase boxes
5 10		OS disclas d'Anéhravaun	0 tonu	ani 2012/02	21172 4 D5 stadios d'antibuves
-		preparation de chanter	45,00.05	361242/02	32 evigention de chariter
1		PperchaDopring	42.mm	78-150213	at the state of th
6	3	whatsuture bear	\$3,0,43	Mor respects.	In Summer Infrastructure Mellow
1		watertifications before	61.mm	761.160813	20-cm
5	ъ.	superinative insulates hos	49 (0.45	Tel: 120312	
5	2	off	213 jours	Mar 16/6/813	2) E
i i	-	menularies exteriorati	105 jours	Van 2010/13	The Parkatis eticizer
5		storiverScholdlandhillib	165 parts	14m 20/00/13	
ē .		08	105 jours	14m 26/89/13	
5	-	OPL	25,8049	Ven 1905/14	35 Z
i i	-	reception luvation	dime	Arr 1805/14	

Figure 1 : Forecast planning

1.5.2 According the forecast planning, 2 main delays were identified:

- Regarding foundations: a natural pollution due to green clay was found and resulted in a delay of 5 weeks
- A short delay of 20 22 days occurred dur to severe weather

1.5.3 Minor delays

- Drying problem with choice of lasure of cladding
- French larch instaed of Russian larch → necessity to fond sawmills → choice: larch + douglas
- Organizational problem with timber structure company → inadequation between needs and workers (confirmation needed)

1.5.4 Planning - reservations

Lifting of reservations: More than 1000 reservations

On the upstream phases of design, the architect remained in its estimations, despite significant changes in the draft planning. On the tracking of the worksite, however, times were multiplied by 2 or even 3. In the draft planning all the technical parts of the process were not taken into account. The technical rooms were under-dimensioned (underestimation of the density of the networks) and it was necessary to revise upwards everything concerning the network of fluids. The design office of the general contarctor underestimated this part although the specifications were clear enough (machines and power listed). In the end it was necessary to double the dimensions for the technical rooms, to raise certain roofs and to recreate floors. The architect devoted 50% more time to what it was initially estimated on the whole project.

1.6 Feedback regarding the use of wood

- Use of local wood: the client wanted local wood. The difficulty of supplying French larch pushed the general contractor to choose douglas above the 1st floor, with characteristics less interesting than those of the larch. FCBA got involved in the technical choices which raises the question of the client's responsibility in relation with this choices. For Mathis, it was necessary to reword the sections because of the change of essence for douglas-fir is a gnarled wood and more nervous than larch. Moreover, Mathis had to refuse deliveries for quality defects and the quantity of waste was significant. This led to a delay that was all the more difficult to manage because the amendment was requested in a late phase.
- When assembling the wood frame, it seems that MATHIS did not implement the means necessary to respect the calendar and encountered problems for the supply of glued laminated beams. The general contractor had difficulty putting pressure on them because, contrary to other companies, MATHIS was a co-contractor for the general contractor and not a subcontractor.
- 15 French windows needed to be changed after less than 1 year of use of the building. Intermediate crosspieces were necessary but it seems that the architect did not want that solution.

- The specification of the client did not provide a requirement for homogeneous aging of wood in outdoor areas. The architect wanted to show that wood could age properly outside and therefore took this parameter into account from the beginning. Typical facade elements were installed to perform finishing tests. Moreover, efforts were made to protect the wood correctly (metal flap, crowning ...). On the most exposed facade to the west the wood was not used.
- The use of laminated flooring was a real discovery in this project for the architect. MATHIS had enough experience in using this constructive system to reassure the architect firm. They now know how to size the frames and now try to propose this constructive system in other projects. Before wood was mainly used in industrial projects but it is possible to propose laminate in the housing and the tertiary. It has an interesting sound quality which can be enhanced in noble buildings.
- Realization of plans
 - Top floor: On the top floor, as the structural elements are outside, MATHIS feared that the wood would not be adapted to the risks of bad weather and / or infiltration. So MATHIS proposed to the architect to replace the diagonal beams with metal and to retrace these lattice beams. This had the effect of modifying the original design, which the architect refused and the estate promotor feared that FCBA would refuse the substitution of the wood for another material. The compromise found was to replace the wood with metal while remaining the initial design of the architect. These discussions led to successive modifications of plans to achieve the best aesthetic / functional relationship. In the end, when FCBA was actually questionned about that point during the case study, he didn't have any problems with changing material.

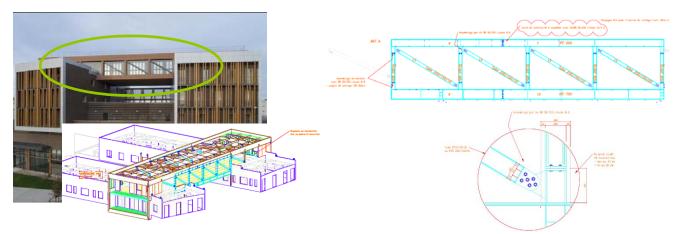


Figure 2: Modifications oft he top floor

 Networks: In the storeys, Mathis had to synthesize the technical batches and the structure batch to allow the networks to pass through the beams. For reasons that MATHIS does not explain, many modifications were requested, in particular for heating / ventilation, and with each new request MATHIS had to redo its plans and take again the justifications for the mechanical strength of the beams after drilling

1.6.1 Relation between actors and planning

In France, companies share the responsabilities of the works done with the project manager. The detailed planning are realized by the companies which can result in modifying the architect's plans.

For the projects, there was no main unconformity between the draft and execution planning. MATHIS and the architect collaborated together directly without exchanging through the general contractor because they already knew each other. But all the subcontractors exchanged with the general contractor who transmitted any useful information to MATHIS.

1.6.2 Checklist of collected documents

Document	Provided	Comment
planning + construction schedule	Yes	Confidential
Building permit application planning	Yes	Confidential
Implementation planning architect	Yes	
(floor plans, 1-2 sections, 1-2		Confidential
elevations, a few details 1:20-1:1)		
Implementation planning structural	No	
engineer		
(floor plans, 1-2 sections, 1-2		
elevations, a few details 1:20-1:1)		
Implementation planning HVAC	No	
engineer		
(floor plans, 1-2 sections, 1-2		
elevations, a few details 1:20-1:1)		
Implementation planning timber manufacturer	No	
(floor plans, 1-2 sections, 1-2 elevations, a few details 1:20-1:1)		
Tender documents timber	No	
construction		
Relevant contracts	Yes	
Calculated planning hours architect	No	
Real planning hours architect	Yes	
Calculated planning hours structural engineer	No	
Real planning hours structural	No	
engineer		

Calculated planning, prefabrication + construction hours timber manufacturer	No
Real planning, prefabrication + construction hours timber manufacturer	No
Images (always deliver images with ready prepared information about copyright, photographer, year etc.)	Yes
List of project participants (complete including all companies)	No
Site plan / organization/logistics	No

2 LCC

2.1 Introduction

LeanWood LCC -tool is a calculation framework to be utilized in

- Economical comparison of high level of energy efficiency (nZEB) in relation to building regulations

- Economical comparison of lean wooden nZEB in relation to wooden apartment building produced by ordinary ways

It may also be utilized in research purposes but also by companies with the help of their own unit cost information. LeanWoodLCC covers new urban timber buildings in any countries. The tool is based on standard-based LCC methods and tools formulated for comparison purposes.

2.2 Principles of Life Cycle Costing

The Life Cycle costs cover capital cost, maintenance cost and energy costs. The life cycle calculations are done for 30 year period in the case of residential buildings. The following issues are taken into account in the calculations [ISO 15686-5:2008 Buildings and constructed assets. Life-cycle costing]:

• Planning and investment cost covers the design and construction costs being based on either unit cost information given by the user or estimated total cost of whole construction project.

• Financial cost is based on real financial needs given by the user.

Residual value is directly calculated by LeanWood LCC -tool

• Capital cost (= investment cost + financial cost – residual value) is directly calculated by LeanWood LCC –tool.

• Maintenance cost are based on unit cost information given by the user [National real estate management Files]

• Heating energy cost (€/kWh) based on calculated demands or monitored results, local average tariffs and local average basic fees. The energy source and unit costs are given by the user of LeanWood LCC-tool [EN 15459:2007. Energy performance of buildings. Economic evaluation procedure for energy systems in building].

• Electrical energy cost is based on the local prices (€/kWh). The energy source and unit costs are given by the user of LeanWood LCC-tool [EN 15459:2007].

2.3 Calculation results

2.3.1 Case study: Helsinki

The building (heated area 7 700 m²) was designed and built in 2013 – 2015 by wooden prefabricated apartment modules being located in the city of Helsinki. The client was a public procurer. The delivery method was design-build method, in which the owner provides requirements for the specified project and awards a contract to a company who will both design and build the project. The contractor under contract to the client is responsible for the project's design and implementation as an entity. nZEB technologies applied in the case study are as follows

- protection towards sun shine
- structures with low thermal transfer and good air-tightness
- effective heat recovery of mechanical ventilation
- energy efficient and smart lightning system

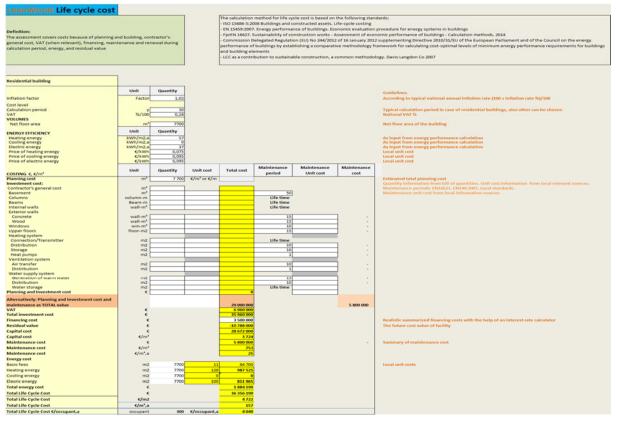


Table 1 shows the results of LeanWood –LCC –tool for the case Eskolantie calculated for two alternatives as follows: Energy efficiency in accordance with the Finnish building regulations and nZEB. Table 1. Example of comparison of Life cycle costs based on LeanWood LCC –tool.

Wooden apartment building Calculation period: 30 y			Eskolantie Energy
Cost level: 6/2015	Unit	Basic	efficient
Net area	m2	7700	7700
ENERGY EFFICIENCY			
Heating energy	kWh/m2,a	80	57
Electric energy	kWh/m2,a	42	37
Price of heating energy	€/kWh	0,075	0,075
Price of electric energy	€/kWh	0,105	0,105
E-value	kWh/m2,a	129	101
Energy class		С	С
COSTING			
Investment cost	€/m2	4 600	4 670
Financing cost		447	454
Residual value	€/m2	1 380	1 400
Capital cost	€/m2	3 667	3 724
Basic energy fees	€/m2	12	11
Heating energy	€/m2	180	128
Electricity energy	€/m2	119	105
Total energy cost	€/m2	311	244
Total maintenance cost	€/m2	780	753
Total Life Cycle Cost	€/m2	4 758	4 722
Total Life Cycle Cost	€/m²,a	158	157
Energy class		С	С

According to the calculations cost optimal wooden nZEB causes only about 70 \notin /m² additional investment cost compared to the construction alternative that only fulfils the minimum requirements by regulations. Savings in energy cost are about 2.3 \notin /m²a, and in annual life cycle cost about 1.1 \notin /m²a as present value for calculation period of 30 years. Also the resale value and user-value (aesthetic value, thermal comfort, high quality of inner climate and good adjustable lightning) are little higher compared to the traditional building. The economic efficiency of energy efficient wooden apartments is improved compared to the basic case calculations (as required by the regulations) in two cases: when energy costs rise and/or the investment costs decrease. The difference between lean production and traditional production is relatively low as the importance of labour costs is minor.

2.3.2 Case study: FCBA Headquarters


The Headquarters of wood technical center FCBA was delivered in October 2014 and is located in Cité Descartes – Champs sur Marne (Paris region – France). The building area is around 10 600 m2 and includes 4 000 m2 of office space and 6 600 m2 of laboratories. 950 m3 of wood were used both for the building structure and the secondary construction (windows, claddings...).


A Life Cycle Cost (LCC) analysis was conducted on 2015 data. The LCC perimeter includes design and construction, operating and maintenance costs. No assumption was made on the residual value at the end period.

Other assumptions on calculations are the following:

- calculation period: 40 years
- discount rate: 4%
- inflation rate (energy/water): 4%

The results are presented in the table below:

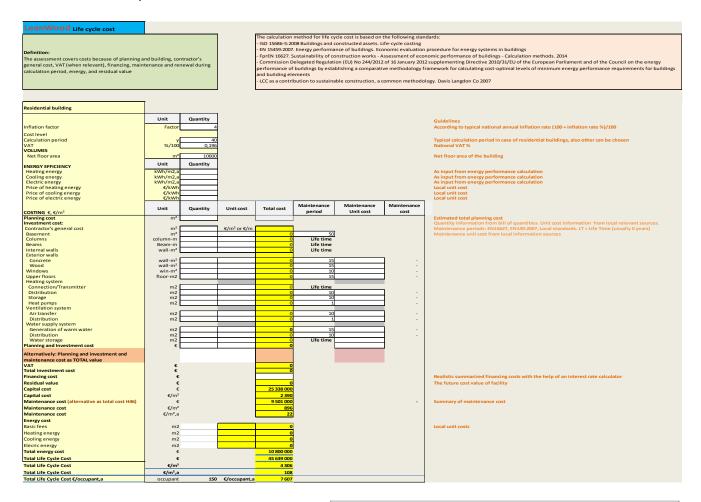

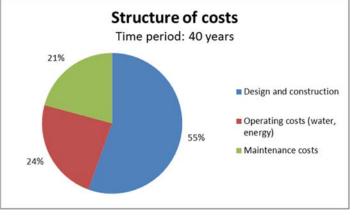

leanWOOD

Book 7 – part C resources

Emilie Bossanne FCBA Institut Technologique, Bordeaux, France

Anne-Laure Levet FCBA Institut Technologique, Champs sur Marne, France

Florence Bannier FCBA Institut Technologique, Bordeaux, France

Jean-Luc Kouyoumji FCBA Institut Technologique, Timber Construction Group, Research Division, Bordeaux, France

31.07.2017

1. Lean method – making the value chain more efficient

Author, editor

Emilie Bossanne

FCBA Institut Technologique, Bordeaux, France

Co-Authors

Florence Bannier

FCBA Institut Technologique, Bordeaux, France

Anne-Laure Levet

FCBA Institut Technologique, Champs sur Marne, France

Jean-Luc Kouyoumji

FCBA Institut Technologique, Timber Construction Group, Research Division, Bordeaux, France

Project Partners

Research

Hochschule Luzern – Technik & Architektur, Kompetenzzentrum Typologie & Planung in Architektur (CCTP) (Koord. Schweizer Konsortium) TUM Technische Universität München, Professur für Entwerfen und Holzbau, Germany (Koord. Int. Konsortium) Aalto University, Chair of Wood Construction, Finland VTT Technical Research Centre of Finland, Finland FCBA Institut Technologique, France

SME Partners/other funding

Uffer AG, Savognin (Switzerland) Makiol Wiederkehr AG, Beinwil (Switzerland) Timbatec Holzbauingenieure AG, Thun, Bern, Zurich (Switzerland) Kämpfen für Architektur AG, Zürich (Switzerland) Lignatur AG, Waldstatt (Switzerland) Gumpp&Maier. Lösungen aus Holz (Germany) lattkearchitekten, Arch. Frank Lattke (Germany) Rakennusliike Reponen Oy (Finland) Federation of the Finnish Woodworking Industries (Finland) KINNO Kouvola Innovation Oy (Finland) SK Finnish Real Estate Federation (Finland) Federation of the Finnish woodworking industries (Finland) LECO Construction, XJ Développement (France)

Funding

KTI Kommission für Technologie und Innovation (Switzerland) BMEL Bundesministerium für Ernährung und Landwirtschaft unter der Projektträgerschaft der FNR Fachagentur Nachwachsende Rohstoffe e.V. (Germany) TEKES The Finnish Funding Agency for Innovation (Finland) Ministry of Agriculture, Fisheries and Forestry Resources, MAAF (France) French Environment and Energy Management Agency, ADEME, (France)

FP7 Seventh Framework Programme European Union WoodWisdomNet+

Insofar as the masculine form is used in the contents of this report solely for reasons of better readability it is assumed that this refers to both genders on equal terms.

CONTENT

1	What is Lean?	
	1.1 Lean philosophy	
	1.2 History of Lean	
	1.2.1 Henry Ford	
	1.2.2 Toyota, Shingo, Ohno and the wastes at Toyota	
2	2 Why Lean in construction?	4
3	8 Examples of Lean tools	
	3.1 5S	7
	3.2 Kaizen	
	3.3 Value Stream Mapping	
	3.4 Last Planner® System	
4	Case studies	

1 What is Lean?

1.1 Lean philosophy

Lean manufacturing or lean production, often simply called "lean", is a systematic method for the elimination of waste within a manufacturing system. In that context, waste is assumed not to participate in the client's satisfaction, not creating any "value" a customer would be willing to pay for.

In other terms, lean is centered on making obvious what adds value by reducing everything else. Lean manufacturing is a management philosophy which roots are very old.

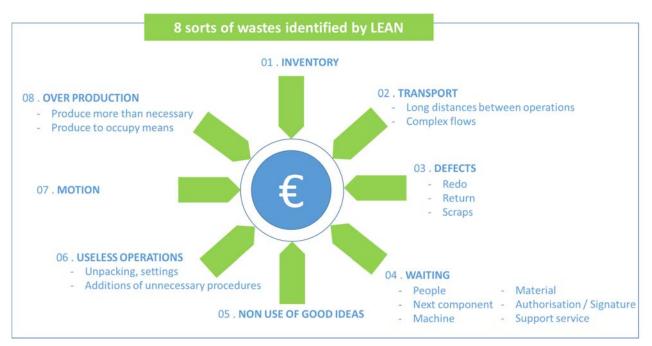


Figure 1 : Sorts of wastes (source: FCBA)

In 1574 King Henry III observes boatbuilding in the arsenal of Venice where boats are assembled in one hour thanks to a continuous flow.

1.2 History of Lean

1.2.1 Henry Ford

Henry Ford in the early 1910's was the first major industrial to try setting up a continuous flow in its production plants, focusing on mass production in order to supply the huge demand of cars that emerged after the Second World War. In his time, Henry Ford has established several practices that are found today in the Lean philosophy. The Ford standards, in the first half of 20th century, were showing among others, the followings items, which are still relevant nowadays:

- The working environments should be (and remain) clean,
- The captains of industry should seek to serve their communities and society in every sense
- The production techniques should not be taken for granted but enter into a continuous improvement scheme

- The manufacturers have to assist their suppliers to produce better and faster
- The managers should not stay in their office but go into the factory and be able to do the job themselves
- The workers must be trained and have the opportunity to improve and enhance the products.

1.2.2 Toyota, Shingo, Ohno and the wastes at Toyota

At the end of the Second World War, the Japan's situation was very tense economically and industrially, mainly compared with the United-States. Therefore, the Emperor of Japan decided that improving productivity was to be considered as a national cause. A young engineer named Taichii Ohno was appointed to get trained in the Ford and General Motors (GM) automotive manufacturing plants regarded at that time to be at the cutting edge of efficiency. It occurred to him among others that a series of simple innovations might make it more possible to provide both continuity in process flow and a wide variety in product offerings. He therefore revisited Ford's original thinking, and invented the Toyota Production System. In the same period, William E. Deming – statistician at the time but now considered as the father of Quality – worked on the development of a new management system based on eliminating waste through collaboration, participation and employees empowerment...

2 Why Lean in construction?

Franck Gilbreth had already in the 1890s, identified the potential of the building sector improvement if he was applying some approaches of the manufacturing industry, especially on the speed of execution and the efficiency of the manpower. Gilbreth is seen as the father of industrial engineering for having worked on the Taylor's principles. Gilbreth was first interested in the brickwork; and noted that many displacements and gestures were purely useless because they didn't contribute in any way to erecting the wall. The worker used to seek each brick, to turn and turn over it to place it then on the wall and plaster it. Gilbreth made several recommendations; including that of locating the pile of bricks on the scaffolding at shoulder-high; supplied by less qualified (and paid less) handlers which allowed the trained masons to focus on their added value. Gilbreth developed a series of best practices that reduced the number of movements and displacements from 18 to 4, minimizing thus the fatigue and maximizing productivity.

Gilbreth set up a series of testing in order to find the optimal load a worker can carry in a wheelbarrow every day safe. He developed labor standards to increase the predictability of work. Gilbreth started his own construction company and was part of the most profitable and respected companies of the early 20th century. With the help of his wife Lillian, he developed a corpus of knowledge that was to become industrial engineering. During the 20th century, the building productivity improved but still slower than in manufacturing. The Cavallo's study carried out in the United States (and published in 2009) showed that over the period 1967-2007, the productivity increased annually of 1,8% in the industrial sectors (excluding industrial operations), but at the same time, only of 0.6% in construction.

A relatively small proportion of total hours spent on a construction site is really productive. The 1990 report of Michael Pappas noted that in steel construction, only 11.4% of the hours observed on site were creating added value. Hammarlund and Ryden in 1989, then Nielsen and Kristensen in 2001 observed in their turn that the added value operations accounted for only 30% of time spent on site all trades taken together. Lauri Koskela in 1992 examined the application of industrial technologies in building. Koskela spent a year à Stanford University as a visiting professor and led a now famous study: "Applying the new production philosophy to construction". He highlighted the parallels between these two sectors by characterizing the building as a form of production. Koskela modelled this new production philosophy from TPS whose effectiveness is no longer makes doubt. While it's true some researchers had proposed before him solutions bases on the same principles (prefabrication and modularization) to address the underperformance of the construction sector, Koskela proposed a new approach but based on the principles of the production philosophy which has three stages:

- 1. Implementation of tools such as Kanban cards
- 2. Implementation manufacturing methods
- 3. Application of a different management approach (Lean Manufacturing, JIT, Total Quality Control...)

Koskela, referring to numerous studies conducted in the United States and Europe in the manufacturing plants, showed that the most effective production management methods are based upon JIT (Just In Time) philosophy. Before him, Schönberger studies in 1986, then Harmond and Peterson's in 1990 were leading to the same kind of findings. In a typical production pattern, the material is conveyed from one work station to the other, passing through very distinct stages: inspected and moved to the next station or placed in storage awaiting to resume its progress. Control and waiting times are considered an integral part of the manufacturing process as a "flow". The transformer stations are considered bringing value while "flow" position are not. Koskela considers the Lean applied to construction, Lean Construction as a flow process combined with transformation activities. This vision was the foundation of what became the TVF (Transformation Value Flow) theory. Improving productivity may go through eliminating or reducing "flow" activities, whilst working on processing activities to make them more effective.

Koskela attributed the prevalence of non-value added activities to three basic causes: design, ignorance and the very nature of production (construction). According to him, poor design would be the fact of tasks division (fragmentation) since each sub-task inherently increases the overall level of control, inspection, waiting and displacements.

Koskela has listed the following heuristic principles:

- 1. Reduce the share of non-value added activity
- 2. Increase the value of the finished product by the systematic consideration of client needs
- 3. Reduce variability
- 4. Reduce cycle time
- 5. Simplify by minimizing the number of steps, equipment and materials as well as links between them
- 6. Increase flexibility in the finished product
- 7. Increase transparency of process
- 8. Focus control over the whole process
- 9. Balance improved flows with conversation improvements
- 10.Benchmark.

It should be noted, in connection with these heuristic principles, that:

- 1. non-value added activities may be limited by their identification, measurement and modification (redesign of the activity)
- 2. the finished product value may be increased by identifying each stage of its manufacturing process and by clarifying the client's needs
- 3. the high variability of production time in construction increases the volume of non-value added activity
- 4. The process control requires measurements as well as an authority assigned to this control which can be interdisciplinary and self-managed regardless of production constraints. Team spirit and cooperation with suppliers (and subcontractors) are important sources of global optimization of the workflow in the case of an organization involving several firms as it is often the case in construction.

Glenn Ballard and Lauri Koskela met at Berkeley University in California, began to compare their visions and aspirations and studied a contribution to a concrete change in the near future of construction. This meeting then this collaboration gave birth in 1993 to the first conference on Lean Construction in Helsinki. It was the beginning of more than twenty years of annual conferences, bringing together researchers and professionals from around the world within the IGLC (International Group for Lean Construction). It was during this very first conference in Helsinki that the term "Lean Construction" was selected, as reminded by Glenn Ballard. Subsequently, Ballard and Howell co-founded the LCI (Lean Construction Institute) in 1997, which quickly expanded national branches in Chile, Denmark and England. Then Ballard invented in 1992, a method of collaborative planning which would become the flagship tool of Lean Construction: LPS (Last Planner* System). The LPS is based on the reduction of hierarchical levels and transfers part of the planning authority to the site managers in order to best allocate the available resources in a weekly forecast. Ballard will complete his system in 1998 by adding the rolling six weeks period and determining collaboratively the planning schedule at the beginning of the operation. These changes aimed to permanently set the flow at the system center: reduce the variability compared to the forecasts and use buffer margins to limit the impact of residual flow variabilities.

Efficiency of construction Lean benefits and drivers Lean in the construction process

3 Examples of Lean tools

3.1 5S

Among the best practices recognized and put into practice by companies, the "5S" occupies a place of choice. This sign designates both an approach, a method, and the 5 fundamental actions to be carried out. This applies to both industry and service companies. In the construction sector, the 5S can be set up on the site as well as for prefabrication and even design development.



Figure 2 : 5S in five stages

The 5S includes 5 steps and 5 key words which start with an "S" in Japanese:

Sorting (Seiri) – sort out the necessary from the unnecessary.

Simplifying (Seiton) – put everything (that we determined necessary in Sorting) in a designated place and mark it so it can easily be seen.

Sweeping (Seiso) – physically clean up the work area; deliberately pick up all parts and materials that are out of place and return each to its assigned place.

Standardizing (Seiketsu) – create standard ways to keep the work areas organized, clean and orderly, and standard ways to do the 5S's.

Self-Discipline (Shitsuke) – follow through with the 5S's agreements.



Before

After

Figure 3 : Example of 5S applied in a furniture company

3.2 Kaizen

Kaizen is a strategy where employees work together proactively to achieve regular, incremental improvements in the manufacturing process. It combines the collective talents of a company to create an engine for continually eliminating waste from manufacturing processes.

Kaizen began its life shortly after world war 2 when the US sent a number of advisers to help the Japanese rebuild their economy; one of these advisers Dr. Deming is often credited with the ideas behind Kaizen stating; " Improve constantly and forever the system of production and service, to improve quality and productivity, and thus constantly decrease costs."

What is Kaizen?

- A team to solve problems to the root
- A method to apply the Leann philosophy
- Meaning in Japanese "change for the better"
- Before everything else, a state of mind involving all stakeholders

Main principles

- Team work
- Not to remain in a blocking situation
- Not to freeze on an idea but to accept criticism
- Do not paralyze one seeking a perfect solution
- Explore several solutions (not only the first idea)
- Strong involvement of people (employees)
- Immediate application of patches
- Systematic test after each correction

Important factors

- Clear mandate at the outset and achievable over time
- Management support
- Involvement of key persons
- Quick help for units in need
- Take into account favorable periods
- Big room to meet close of the workplace
- Coordinator mastering the subject
- Actions need to be made during the Kaizen, not after
- Continuous communication between teams, management and affected staffs

To avoid

- Start without the involvement and support of the management staff
- Seek to resolve non-jurisdictional problems
- Misleading or vague terms of reference that may give rise to confusion
- Rush to implement the solution

Starting a Kaizen – Main steps

- Meeting the management (check that everything is under control of that management, otherwise involve other staffs)
- Suggest the Kaizen approach
- Observe on the ground
- Prioritization of action

- Validation of mandate
- Launching and brainstorming

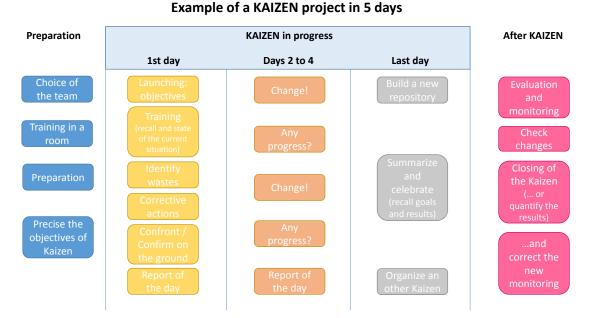


Figure 4 : Example of a KAIZEN project in 5 days

3.3 Value Stream Mapping

VSM is a tool used to visually map the flow of production. It shows the current and future state of processes in a way that highlights opportunities for improvement. VSM exposes waste in the current processes and provides a roadmap for improvement through the future state. It identifies activities that:

- create added value (AV)
- bring no added value (NAV)

VSM can be organized in 4 steps, within a perimeter that starts with raw material and information transformation and that ends with a product ready to be delivered to the end user or final client.

Step 1: define the scope of analysis

According to the needs and problems identified, the VSM tool can be implemented at different levels of an organization:

- Strategic level (macro): whole process, at the scale of one or several companies
- Operational level (micro): manufacturing process of a specific product
- Detailed level: analysis of a procedure or a specific operation.

Step 2: Map current status

On a building site for example, for a process than needs to be studied, the task consists in reporting the operations carried out to realize that process:

- Work time (in seconds)
- Waiting time (in seconds)
- Stocks and materials stored on the workstation
- Handling modes
- Security problems and ergonomic constraints
- Material, human and tool flows.

The mapping of the process distinguishes tasks with added value and those without added value.

Step 3: develop the future state

Once the mapping finished, the main constraints that slow down the flow and/or that do not generate any added value can be modified:

- Move workstations in order to keep only those with added value;
- Remove steps not really essential;
- Optimize flows: standardize, work on zonings, create buffer stocks;
- Set up a visual management in order to master quickly any situation.

Step 4: change the current state in a future state

The working group defines the plan action to set up to transform the current process in the future process. The actions flow directly from the future state defined previously. They are prioritized regarding their impact and the ease of implementation. The project leader coordinates the deployment of the action plan that starts immediately.

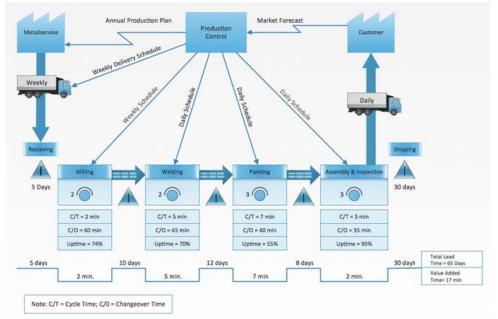


Figure 5: Example, This sample Value Stream Map shows how customer value is created in the steps of manufacturing, production control, and shipping processes (source: Conceptdraw)

3.4 Last Planner® System

Unlike other lean tools used in construction, LPS did not emerge from the Toyota Production System, rather, it was an approach developed by construction practitioners specifically for the construction industry. The initial principles of the LPS were to: (1) improve workflow and (2) improve plan reliability and predictability^{1,2}.

The development of the LPS in the early 1990s resulted in the consulting work of Glenn Ballard and Gregory Howell's in the industrial construction section.

¹ Ballard, H.G., (2000). The last planner system of production control. PhD thesis, University of Birmingham

² Ballard, G., (1993). Lean construction and EPC performance improvement. In: L.F. Alarcón, ed. Lean Construction. Rotterdam, Netherlands: A.A. Balkema Publishers


LPS is an easy-to-use, spreadsheet-based tool that is mainly visual and easy to use on site. After a short training, all the companies implicated on the building site define and plan all their tasks on a week basis, over a period of 2 months (organizational checklist).

The LPS is a production control system in which the "last planner", that is, the one who performs the last task, is in the best position to inform about the possibility of a planned job. This feedback is crucial in guaranteeing the performance of a given task. If it is planned in the overall planning (should be done) and everyone has verified that it could be done, then there is no reason (except hazards) that it can't be carried out.

5 steps of	LPS	Reliability
Master schedule	Classic planning (structure and/or hinge) with identification of milestones and construction sequences	40 – 50%
Phase planning	Development of the sequences and compression of the schedule with all the participants for the 3 or 4 me to come	50 - 70%
Look Ahead Planning	Team planning for the next 6 to 12 weeks Identification of constraints, definition of the actions to be carried out	70 - 90%
Production Planning	Detailed planning by the "last planners" Only activities without any constraints / barriers	90 - 100%
Analysis of PPC (Percent Plan Complete)	Identification of the reasons for failures Continuous improvement through PPC	


LPS is based on 4 pillars:

 Participatory planning: the one who does the work is the one who makes promises (estimated time and cost, quality to be delivered and milestones to be respected). If a promise can't be held, then it should not be made. This implies that each actor has the ability to say "no I can't".

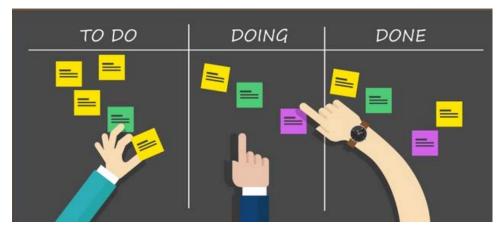

Participatory planning (source: www.leanconstructionblog.com)

2. A collaborative definition of the inputs and outputs delivered by each bed officer is required for each work package (to avoid unnecessary expectations due to misunderstanding of requirements and interdependencies).

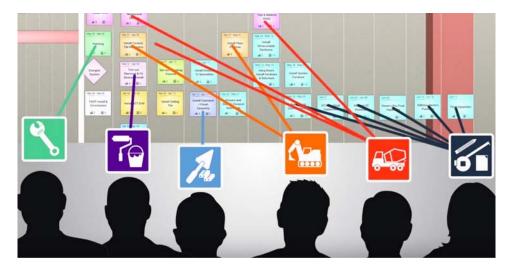

Collaborative definition of inp (Source: https://www.touchplan.io/)

- 3. The "last planner" is directly responsible for the monitoring and control of his work. If a promise can't be met, a cause tree will be established to deal with the sources of pollution and desynchronization and prevent them from becoming recurring.
- 4. Frequent meetings to share "what remains to be done" in real time are needed to adapt, collectively and at the same pace, to inevitable changes during the project (the impact of changes on inputs and outputs is known to all, and continuously).

What LPS changes

Traditional planning

Last Planner® System

- Planners plan and doers do
- Thermostat model of control (reactive)
- Inconsistent learning from plan failureScheduled tasks are pushed onto does
- without regard to readiness - It is assumed that planning produces
- perfect plans
- Planning is done collaboratively
- Control is proactive (making ready) and reactive
- Systematic learning from plan failure
- Doers are required to commit only to ready tasks
- It is assumed that all plans are forecasts and all forecasts are wrong

One main principle of LPS is that it Strengthens collaboration by bringing together all the companies around the planning and identify the blocking points in advance to coordinate the work of companies in space and time.

4 Case studies

Many examples of companies who have engaged Lean projects exist. In the sector of construction, most examples are related to big companies and very few are specific to wood construction. The following examples focus on wood construction companies.



Number of employees: < 50 Turnover (2015): 5,5 M€ Part of a group of: 230 employees, 30M€ Example of characteristic products:

- Light frame truss (70% of production)
- Traditionnal carpentery

1. On what perimeter was LEAN implemented?

The whole company Part of the company: production of light frame truss

- 2. For what reasons did the company started implementing LEAN?
 - o Optimisation of the production line
 - Search of better productivity
 - o Market benchmark
- 3. When did it start?

The Lean initiative started in 2012 and implemented in 2013. The approach led to several decisions, some of which are still operative: hiring a team leader, material investment (stacker), 5S at the workstations, flow management. On the other hand, others were not maintained, for example mutual assistance at the workplace

4. What tools were used?

\times	5S
	PDCA
	VSM
	Kaizen
\times	Visual management
	Kanban
	TPM
	6 Sigma
	Gemba Walk
\times	SMED
	Poka-Yoke
	Other (precise)

5. What were the different steps and methods used to implement Lean tools? Several training sessions were organized and the company was accompanied by an expert to:

- Identify "non added value" at different workstations
- Diagnosis to identify what was already in place in the company
- Follow production indicators and communicate on these indicators
- Implementation of the action plan

In took 6 months between the kick-off and the first results.

6. How did the employees react to changes implemented by Lean? Generally speaking the employees reacted well; they were open to changes aiming to improve working conditions. The project was guided by a pluridisciplinary team: general and production management and 2 operators played the role of relay to their colleagues. The focus was put on the improvement of working conditions. Productivity was a second argument explained afterwards to the employees.

7. What were the evolutions/results obtained? Did you have indicators to follow? The company identified to main evolutions:

- the weekly communication on productivity indicators (productivity / absenteeism and work accidents / budget compliance scheduled hours) which allow a real-time return on performance and a better projection regarding the organization to come the biring of a team leader.

- the hiring of a team leader

- the introduction of a productivity bonus

8. Did you identify any limits to Lean?

What's most interesting is the philosophy behind the Lean word, and the "hunting of non added value". But we had to hire a team leader to achieve our results. The figures show now that the initiative was beneficial.

9. What advice would you give to a company who wants to implement Lean in its activity?

The major success factor is to implicate the employees from the very beginning of the project.

Impliquer le personnel, l'intégrer à la démarche dès le départ. Le personnel est force de proposition.

Pointer les aspects concrets (conditions de travail, tâches inutiles, ...).



Number of employees: < 50 (17) Turnover (2014): 3,7 M€ Part of a group of: <50 employees, 0,5M€ Example of characteristic activities/products:

- Iumbering
- sawmill
- parquet flooring
 - 1. On what perimeter was LEAN implemented?

The whole company Par

Part of the company

- 2. For what reasons did the company started implementing LEAN?
 - o Optimisation of production
 - Produce more with the same number of employees but without working more hours

0

3. When did it start?

The Lean projet was carried out in 2012 – 2014. Several aspects of the projects still remain today: display and sharing of information, production scheduling

	4.	What tools were	used?
	5S		
	PDCA		
\boxtimes	VSM		
	Kaize	n	
\boxtimes	Visua	l management	
\boxtimes	Kanba	an	
	TPM		
	6 Sigr	ma	
	Gemba	a Walk	
	SMED		
	Poka-	/oke	
	Other	(precise)	

5. What were the different steps and methods used to implement Lean tools? We started with a training session of 2 days and then an expert from the French National Association of Standardization (AFNOR) followed our progress.

6. How did the employees react to changes implemented by Lean? At the very beginning the employees asked questions about the final foal of the approach. Today, they are quite satisfied about what was achieved and what is still applied.



Productivity has indeed increased, as well as our reactivity. However, the global context of the company changed a lot between the beginning and the end of the approach so it is difficult to clearly identify the benefits of this Lean approach. Besides, it enabled us to achieve other results that were not identified at the beginning like a better use of some machines and a better management of bottleneck.

8. Did you identify any limits to Lean?

Applied to our context, we didn't see any limit.

Non, pas trouvé de limite par rapport à leur situation.

Méthode applicable chez eux quel que soit le nombre de salariés.

9. What advice would you give to a company who wants to implement Lean in its activity?

A lean approach offers a different vision of your organization. Communication is a key issue. In our project



Between 2012 and 2014, AFNOR (French Association of Standardization) helped Burgundy (French region) companies of the wood industry to implement Lean management in their activities. The objective of this collective program was to help the participants rethink their organization, to implicate the employees, reduce useless costs, master time and satisfy customers, while improving working conditions.

Number	Employees and turnover	Main activity	Actions	Results
1	98 employees 15 M€ (2013)	Lumbering	- Implementation of ritual management - Creation of working groups - Control of production with relevant indicators - Computerization of production	 Productivity gain Fluid communication Approach to decision-making
2	103 employees (81 handicapped workers) 2 M€	Carpentry, green spaces, cleaning	 Build skills in lean tools Better organize production Improve ergonomics Improve production operations Better identify the status of a product 	 Improvement of manufacturing times Federative approach
3	38 employees (34 handicapped workers) < 1 M€	Carpentry, conditioning	 Improve inventory management Improve production flows Train staff Map the organization 	 Support for change Questioning of production practices Restore meaning to work Putting the client at the heart of the work

17

r	1	1		1
			 Define the goals to achieve Revisit existing practices 	
4	15 employees 4 M€	Flooring	 Identify blockings and bottlenecks Establish follow-up tools and indicators Reliability of production 	 Reduce the failure rate Better decision- making Optimize the implementation Rethinking all material flows
5	33 employees 6 M€	Light frame truss	 Involve local management Appropriate new methodologies (5S, asset management) Set up the proximity Skills Invest in suitable equipment 	 Removal of repetitive and physical tasks Creation of emulation within teams Exceeding budgetary targets
6	62 employees 12 M€	Second transformation of wood	 Improve the organization Gain visibility on production Identify productivity gains through a cost analysis 	 Creation of a driver position Rationalization of production on Operations with higher added value Improvement of working conditions (Cleanliness, storage and circulation)





Arbonis was created in 2015 after the leader VINCI (1 400 M€ turnover) redeem four production units in France that produce glulam and timber frame construction. It now count more or less 300 employees with of turnover of 44 M€. There are four design offices and therefore it became quickly difficult to share information. According to the market conjuncture, prices are a fixed parameter. Therefore in order to achieve savings the first reflex was to optimize purchases and then workforce. So afterwards the only way to pursue efforts was to identify waste. This is how the Lean initiative started.

In our approach, Man is in the heart of the system and the first step was to transpose the general philosophy to the company's culture.

In took 3 months to set up the lean program:

- Accompanying change: to make employees understand that we are in a continuous process and that we are obliged to progress (PDCA), improvements must be supported by standardization
- Common culture of quality, supported by tools: use of the 5S tool
- Process control: use of tools like AMDEC and VSM
- Planning control: LPS

Implementation of tools

5S

The 5D tool was applied to 3 manufacturing workshops, each on one plant. In order to allow the 5D tool to be implemented easily and to be adaptable, the company has defined 3 code colors corresponding to frequencies of actions (example: the blue code means "daily" associated with the "sort" step applied to slings, which means that the slings must be evacuated daily. The pilot projects were carried out by workshop managers who became autonomous in the process. VSM

This involves identifying the strengths and weaknesses of an industrial process at each of its stages.

LPS

With this method, the last intervener gives his need and the chain above him adapts itself to respond these needs. We talk about need and coherence between tasks, which makes it possible to define critical paths and to define a planning.